



### H100 FTD SERIES CABLE TRAY ( PG )

### H100 ФТД СЕРИЯ КАБЕЛЬНЫХ ЛОТКОВ ( СЕНДЗИМИР )



Product Code-1 Код Товара-1	H mm	W mm	T mm	L mm	Weight / Вес (Kg/mt)
FTD 20-10-15 PG	100	200	1,5	3000	6,633
FTD 30-10-15 PG	100	300	1,5	3000	7,498
FTD 40-10-15 PG	100	400	1,5	3000	8,361
FTD 50-10-15 PG	100	500	1,5	3000	9,225
FTD 60-10-15 PG	100	600	1,5	3000	10,088
FTD 20-10-20 PG	100	200	2,0	3000	7,992
FTD 30-10-20 PG	100	300	2,0	3000	8,777
FTD 40-10-20 PG	100	400	2,0	3000	9,562
FTD 50-10-20 PG	100	500	2,0	3000	10,342
FTD 60-10-20 PG	100	600	2,0	3000	11,132




### H100 FTD SERIES CABLE TRAY ( HDG )

### H100 ФТД СЕРИЯ КАБЕЛЬНЫХ ЛОТКОВ ( ГОР. ЦИНК )



Product Code-1 Код Товара-1	H mm	W mm	T mm	L mm	Weight / Вес (Kg/mt)
FTD 20-10-15 HDG	100	200	1,5	3000	6,633
FTD 30-10-15 HDG	100	300	1,5	3000	7,498
FTD 40-10-15 HDG	100	400	1,5	3000	8,361
FTD 50-10-15 HDG	100	500	1,5	3000	9,225
FTD 60-10-15 HDG	100	600	1,5	3000	10,088
FTD 20-10-20 HDG	100	200	2,0	3000	7,992
FTD 30-10-20 HDG	100	300	2,0	3000	8,777
FTD 40-10-20 HDG	100	400	2,0	3000	9,562
FTD 50-10-20 HDG	100	500	2,0	3000	10,342
FTD 60-10-20 HDG	100	600	2,0	3000	11,132

### Technical Details Технические Детали

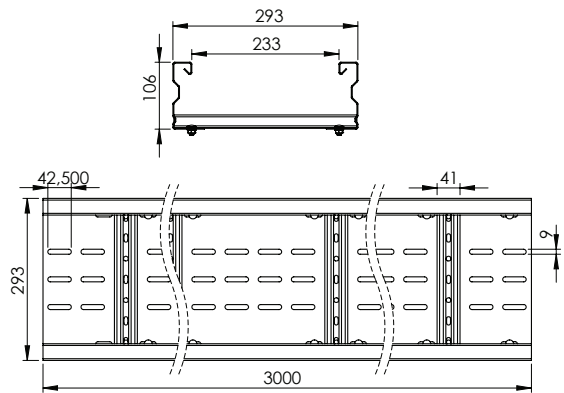

### Load Graph ( PG / HDG ) График Нагрузок ( Сендзимир & Гор. Цинк )

#### Description:

- 1- Cable Ladder standart length is 3000 mm.
- 2- Differnt production lenghts are available.
- 2- Cable Ladder is fast connect type, connectors are not required.
- 4- For ordering Stainless Steel cable ladders add ( SS304 ) to code.
- 5- Cable Ladders are made of click rung system, no welding is used..
- 6- Cable Ladder consists of 10 rungs.
- 7- Production as 2mm thickness is possible upon request.
- 8- Production of different thicknesses is available

#### Описание:

- 1- Стандартная длина кабель-роста составляет 3000 мм.
- 2- Доступны различные длины изделий.
- 2- Кабельная лестница имеет быстроразъемное соединение, соединители не требуются.
- 4- Для заказа кабельных лестниц из нержавеющей стали добавьте (SS304) к коду.
- 5- Кабель-Рост изготавливается по системе защелкивающихся поперечных, без сварки.
- 6- Кабельная лестница состоит из 10 поперечных..
- 7- Возможно изготовление толщиной 2мм.
- 8- Возможно производство в разных толщинах

